Technical Manual

DELTA-40

SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

* Nominal Impedance:	4–6 ohm
* Recommended Amp Power:	25–150 W
* Frequency Response:	38 Hz – 35 kHz
* Sensitivity:	90 dB / 2,8V / 1 m
* Crossover frequency:	400 HZ / 4 KHZ

SYSTEM COMPONENTS:

* Cabinet	CDELTA–40 (Not for sale)
* Grille:	GDELTA–40 (2402560)
* Woofer	HT210IY16 210mm Woofer 25mm voice coil
DC Resistance:	5,6 ohm
* Midrange	TC11MGZA–06 115mm Midrange 25mm voice coil

SYSTEM COMPONENTS: (cont'd)

DC Resistance:	4,3 ohm
* Tweeter	EMIT–R DELTA
DC Resistance:	3,5 ohm
* Crossover Network:	NDELTA–40 (2702560)
* Crossover Network:	NDELTA–40 (2702562)

PHYSICAL SPECIFICATIONS:

* Enclosure Dimensions (H.W.D):	37,8x15,1x16,5 In. D (961x384x420mm D)
* Shipping Weight:	53 lbs. (24 kg.)

WARRANTY INFORMATION:

* Refer to the Warranty Statement packed with each product

PACKAGE

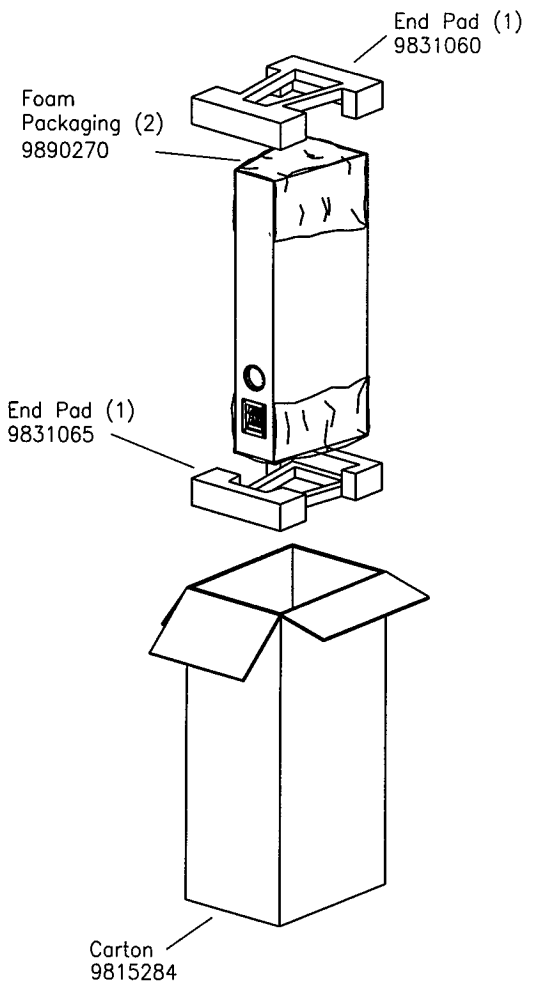

WIRING DIAGRAM

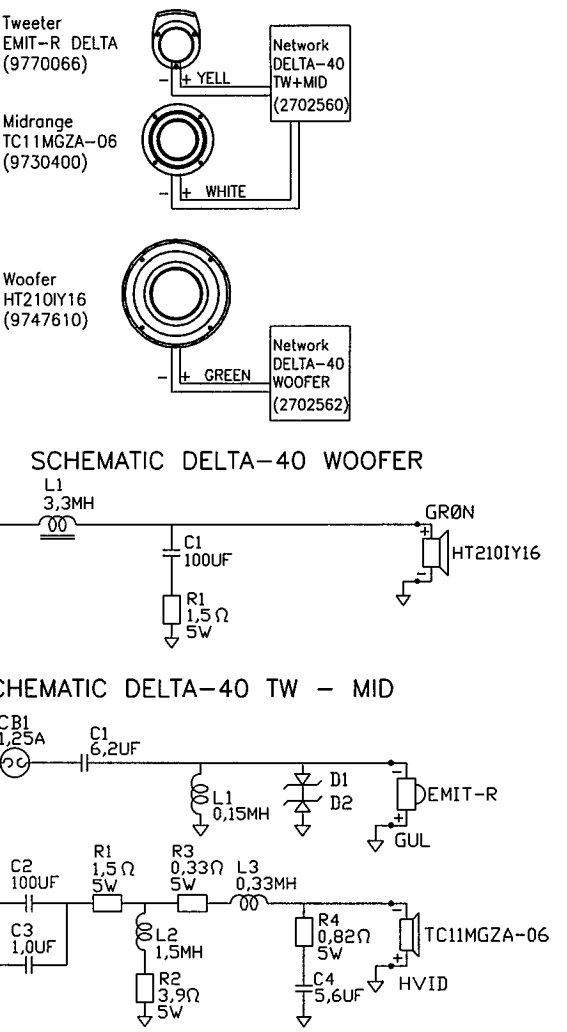

NOTE: CONE/DIAPHRAGM KIT NOT AVAILABLE.
DEFECTIVE DRIVER SHOULD BE REPLACED.

DELTA-40

Valid fron serial no. 01001
Rev. 05/12–1997

COMPONENT EXPLODED VIEW

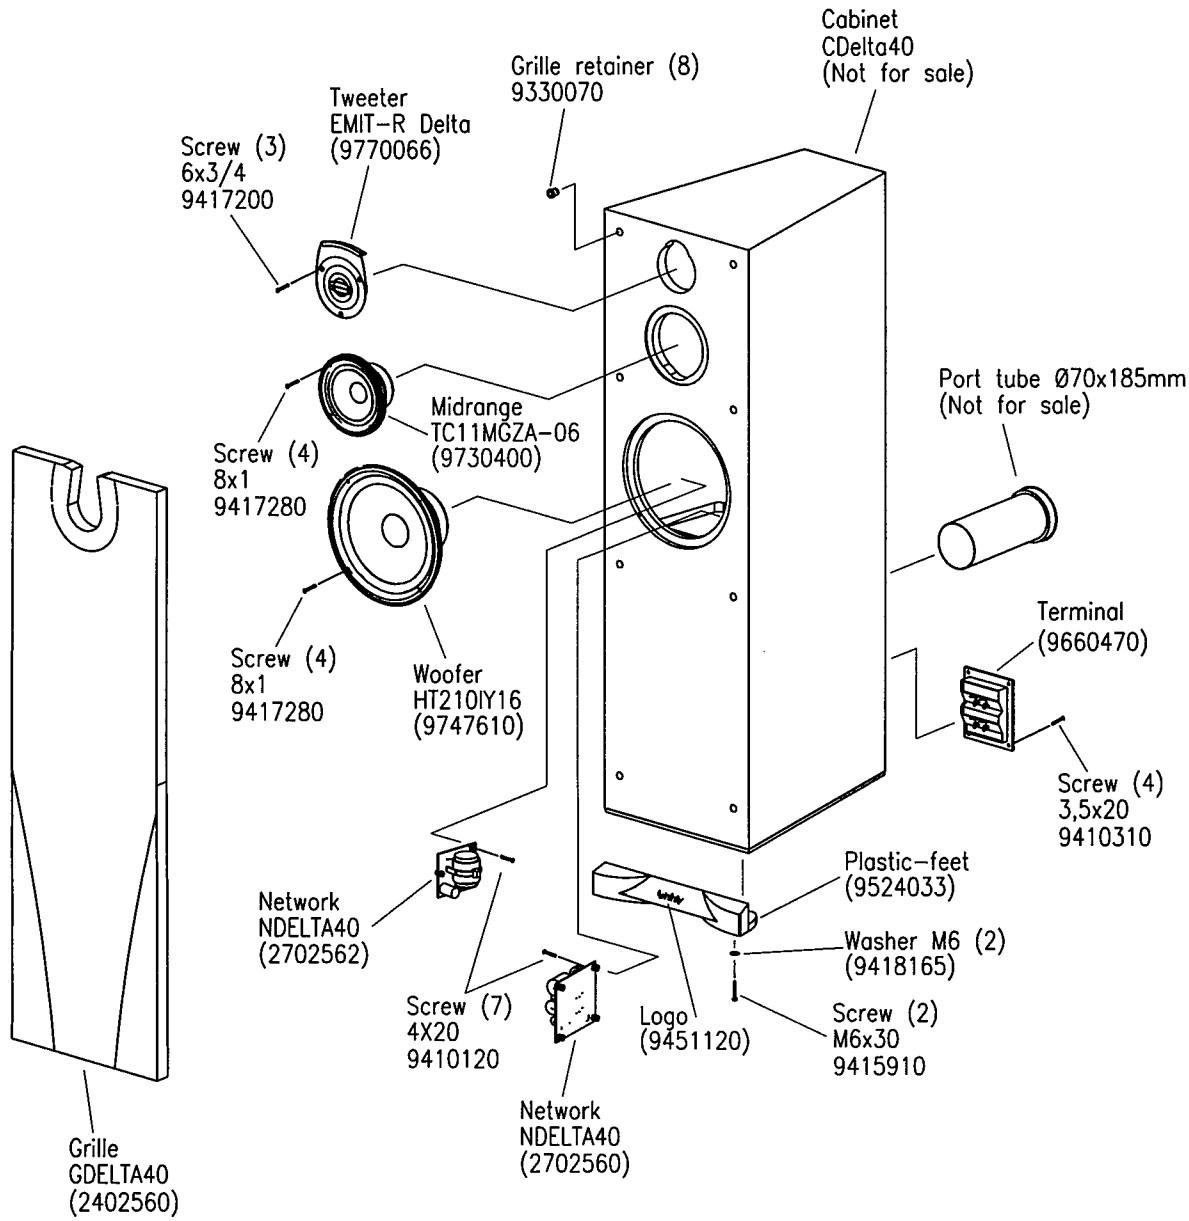

Spike (1)	(9431380)
Spike (2)	(9431250)
Nut M6 (3)	(9418400)
Robberfeet (1)	(9331300)
Robberfeet (2)	(9331550)